





HEAVY DUTY DOOR CLOSER

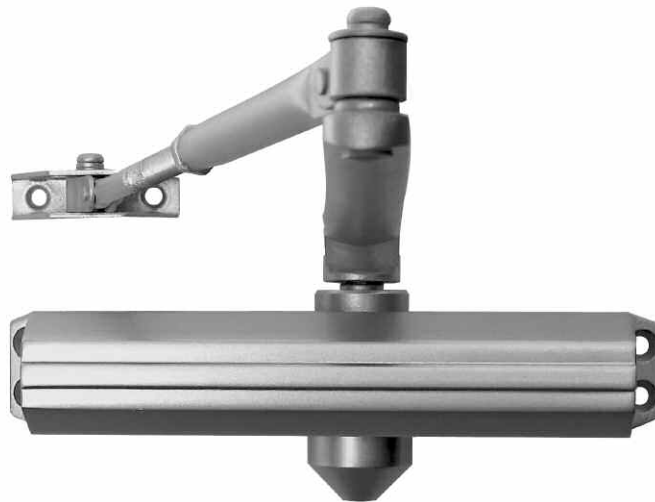

Commercial Grade 1 Surface closer that conforms to the ANSI A156.4 standards and is UL/UL10C Listed. The adjustable (1014BFBC) closers meet the American with Disabilities Act requirements of 5 lbs. Interior and 8.5 lbs exterior ANSI A117.

PRODUCT FEATURES

- Non-handed, cast body & forged arm. Standard arm accommodates up to a 3-1/4" reveal.
- Installation types; regular, top jamb & parallel arm mount. (requires PAB)
- Three individual non-critical seated valves that will not allow you to back them out causing them to leak: Latch, sweep & backcheck standard on all closers
- Standard spring sizes are 4 (1004BC), 5 (1005BC).
- Adjustable spring sizes: 3-6 (1036BC)
-  ADA adjustable spring size: 1-4 (1014BFBC)
- Maximum opening of up to 180 degrees.
- Fits standard 9-1/6" x 3/4" wide CTC hole pattern.
- Retrofits Norton 1600, Yale 50 and other popular brands..
- Available in aluminum & duromodic finish.
- 25 Year limited warranty to be free of manufacturer's defects.
- A wide variety of options are available (see accessories page).



HEAVY DUTY DOOR CLOSER

ACCESSORIES

NARROW DROP PLATE

For top jamb where the ceiling clearance is between 1-3/4" and 2-5/8". Permits parallel arm installation on doors with a minimum top rail of 2-1/2". (medium to narrow stile)



NDP

LARGE DROP PLATE

For top jamb mount when overhead ceiling clearance is less than 1-7/8". Permits parallel arm installation on doors with a minimum top rail of 2-1/2". (medium to narrow stile)



LDP

PARALLEL ARM BRACKET

Needed for mounting standard arm closer in parallel arm installation.



PAB1000

FRICTION HOLD OPEN

Standard friction hold open arm (non-handed).



HOARM1000

FULL COVER

Optional full plastic cover.



COV1000

SEX NUTS

Sex nuts for 1-3/4" thick doors



SEXNUT