



## 2000 SERIES

### OVERHEAD CONCEALED CLOSER



The 2000 Series Overhead Concealed Closer is designed to replace most Jackson type OHC closers. The light duty model meets the Americans with Disabilities Act requirement of 8.5 lbs. for exterior doors, ANSI A117.

### PRODUCT FEATURES

- Single or double acting (non-handed).
- Dual non-critical valves control latch and sweep speeds.
- Available in light, regular or heavy duty fixed spring sizes.
- Light duty meets the Americans with Disabilities Act requirements of 8.5 lbs. exterior doors, ANSI A117.
- Medium duty recommended for 3'0-3'6 exterior doors.
- Heavy duty recommended for 3'6-4'0 exterior doors.
- Integral positive stop limits door swing to 90° or 105°.
- For doors up to 250 lbs.
- A pressure relief valve protects closer from damage caused by forced closing.
- Conforms to ANSI A156.4 requirements.
- A wide variety of options are available (see accessories page).
- 5 year limited warranty from manufacturer's defects.

# 2000 SERIES



## OVERHEAD CONCEALED CLOSER

### MODELS

LIGHT DUTY			MEDIUM DUTY			HEAVY DUTY		
Recommended for 3'6" In t. – 3'0" Ext. Door			Recommended for 3'6" In t. – 3'0" Ext. Door			Recommended for 4'0" In t. – 3'6" Ext. Door		
20-20	105 Degrees	Hold Open	20-30	105 Degrees	Hold Open	20-40	105 Degrees	Hold Open
20-21	105 Degrees	No-Hold Open	20-31	105 Degrees	No-Hold Open	20-41	105 Degrees	No-Hold Open
20-22	90 Degrees	Hold Open	20-32	90 Degrees	Hold Open	20-42	90 Degrees	Hold Open
20-23	90 Degrees	No-Hold Open	20-33	90 Degrees	No-Hold Open	20-43	90 Degrees	No-Hold Open


APPROXIMATE OPENING FORCE IN POUNDS	CENTER HUNG				OFFSET SLIDE-ARM			
	2/6 x 7/0	3/0 x 7/0	3/6 x 7/0	4/0 x 7/0	2/6 x 7/0	3/0 x 7/0	3/6 x 7/0	4/0 x 7/0
Extra Light Duty	6	4.5	4	N/A	8	6	5.5	5
Light Duty	10	8	6	5	14	12	10	8
Regular Duty	12	10	8	6	17	14.5	13	11
Heavy Duty	17	15	13	11	N/A	19	17	15

N/A = Application not recommended. NOTE: Readings are in pound force required to open door and are taken at the lock stile to full degree of opening.

### ACCESSORIES

#### BOTTOM PIVOT SET

*Adjustable Dual Purpose Bottom Pivot Set  
Used for Center Hung Floor Mount or Threshold Mount*

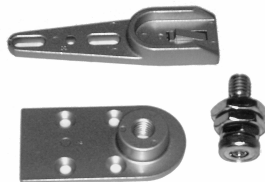

**OHCPIVOT**



# 2000 SERIES

## OVERHEAD CONCEALED CLOSER

### ACCESSORIES

#### SIDE LOAD ARM ASSEMBLY


"S" Type - for 1/2" Deep Rails



SLA

#### END LOAD ARM ASSEMBLY


"A" Type - for 1" Deep Rails



ELA

#### END LOAD ARM ASSEMBLY


"K" Type - for 5/8" Deep Rails



ELAK

#### END LOAD ARM ASSEMBLY


"PT" Type - for 7/8" Deep Rails



ELAPT

#### OFFSET TOP ARM ASSEMBLY


"JO" Type - for 7/8" Deep Rails

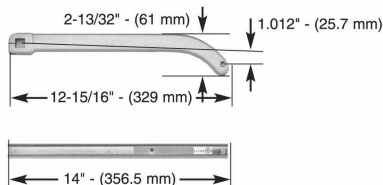

2057

#### OFFSET TOP ARM ASSEMBLY

"JO" Type - for 5/8" Deep Rails

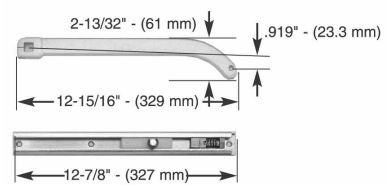

2055